

COMPRESSED AIR FILTER - VAYU™ LARGE

SHAVO
FIRST NAME IN PNEUMATICS


SF 70G (G^{3/4}, G1, G1^{1/4}, G1^{1/2})

FEATURES

- Shavo's VAYU Series Large Flow Range general purpose Filter removes upto 99% of the liquid water.
- Design of the filter elements gives both surface and depth filtration for cleaner air.
- Ideally suited for header lines and large flow rated tools and cylinder operations.



PARAMETERS	SPECIFICATIONS
Pipe Threads	G ^{3/4} , 1, 1 ^{1/4} , 1 ^{1/2} Parallel (F) - Standard NPT/BSPT - Optional
Filter Element Size	50 micron (std) : 5 micron (Optional)
Element Material	Plastic (Polypropylene) - Standard Sintered Bronze - Optional
Body Material	Al. Alloy die-cast
Bowl Material	Al. Alloy Metal with sight glass - Standard
Maximum Inlet Pressure	17.5 kg/cm ² (250 psig)
Maximum Operating Temperature (ambient)	80° C (175° F)
Standard Nominal Flow Rate (at 6 bar supply pressure and 1 bar pressure drop)	3/4" : 266dm ³ /sec (560 scfm) 1 to 1 ^{1/2} : 333dm ³ /sec (700 scfm)
Drain	Manual - Standard Automatic - Optional

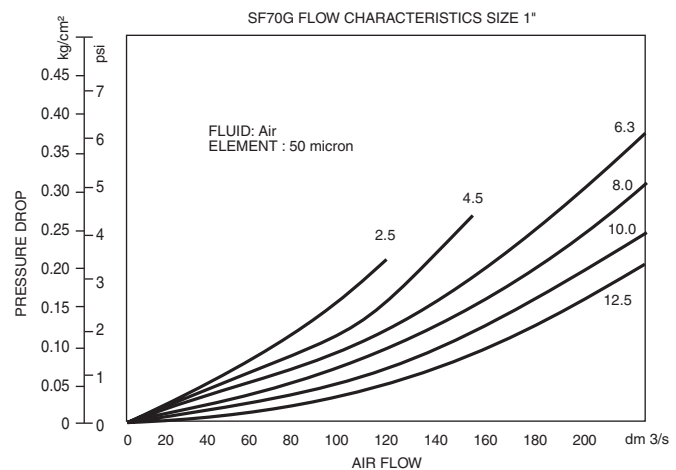

COMPRESSED AIR FILTER - VAYU™ LARGE

SHAVO
FIRST NAME IN PNEUMATICS

SF 70G (G^{3/4}, G1, G1^{1/4}, G1^{1/2})

Size	Flow (dm ³ /s)	Element (um)	Drain	Bowl	Model
G1	333 dm ³ /sec	50	Auto Manual	Metal Metal	SF70G-8G-A3DN SF70G-8G-M3DN
G 1 1/2	333 dm ³ /sec	50	Auto Manual	Metal Metal	SF70G-BG-A3DN SF70G-BG-M3DN

Option Selector

Sample Model Number → **S F 7 0 G - 8 A - M 3 D N**

Position → **0 1 2 3 4 - 5 6 - 7 8 9 10**

