

# COMPRESSED AIR LUBRICATOR - VAYU™ LARGE

FIRST NAME IN PNEUMATICS


## SL70 (G<sup>3/4</sup>, G1, G1<sup>1/4</sup>, G1<sup>1/2</sup>)

### FEATURES

- Shavo's VAYU Series Large Flow Range Lubricator is useful to lubricate air tools, cylinders, valves, air motors and other air driven devices.
- Use Oil-Fog model to lubricate a single tool/device or choose 'Micro-Mist' in systems with complex piping or multiple points of lubrication.



PARAMETERS	SPECIFICATIONS
Pipe Threads	G <sup>3/4</sup> , 1, 1 <sup>1/4</sup> , 1 <sup>1/2</sup> Parallel (F) - Standard NPT/BSPT - Optional
Type	Oil-Fog / Micro - Mist
Body Material	Al. Alloy die-cast
Bowl Material	Al. Alloy Metal with sight glass - Standard
Bowl Capacity	1 litre
Maximum Inlet Pressure	17.5 kg/cm <sup>2</sup> (250 psig)
Maximum Operating Temperature (ambient)	80°C (175°F)
Standard Nominal Flow Rate (at 6 bar supply and 1 bar drop)	3/4" : 156dm <sup>3</sup> /sec (328 scfm) 1 to 1 <sup>1/2</sup> : 195dm <sup>3</sup> /sec (410 scfm)
Minimum reqd flow (at 6 bar inlet)	3.4 dm <sup>3</sup> / sec (7.2 scfm)
Recommended Lubricants	Use any misting type oil rated 50 - 200 SSU (ISO grade 7 - 46) at 38° C (100° F) Use oils which are compatible with the material of construction.

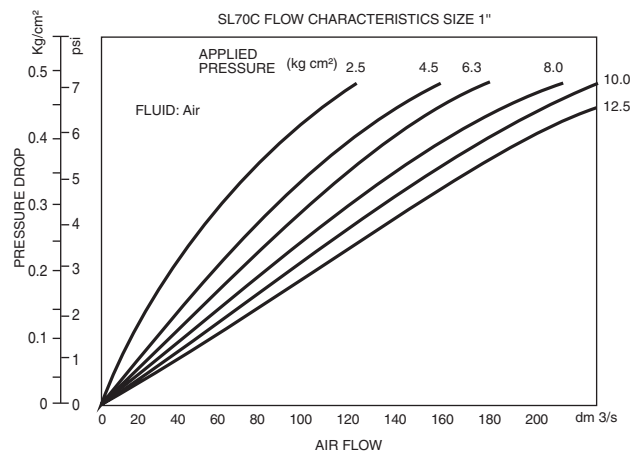

# COMPRESSED AIR LUBRICATOR - VAYU™ LARGE

FIRST NAME IN PNEUMATICS

## SL70 (G<sup>3/4</sup>, G1, G1<sup>1/4</sup>, G1<sup>1/2</sup>)

Size	Flow (dm <sup>3</sup> /s)	Start point (dm <sup>3</sup> /s)	Bowl	Bowl Capacity	Model
G 1	195 dm <sup>3</sup> /sec	3.4 dm <sup>3</sup> /sec	Metal	1 Litre	SL70C-8G-DN
G 1 ½					SL70C-BG-DN
G 1	195 dm <sup>3</sup> /sec	3.4 dm <sup>3</sup> /sec	Metal	1 Litre	SL70M-8G-DN
G 1 ½					SL70M-BG-DN

### Option Selector

Sample Model Number → **S L 7 0 C - 8 A - D N**

Position → **0 1 2 3 4 - 5 6 - 7 8**

