

COMPRESSED AIR LUBRICATOR - MINIATURE

FIRST NAME IN PNEUMATICS



SL07 (G 1/8, G 1/4)

FEATURES

- Shavo's Miniature Series Micro-Mist Lubricator provides fine Micro-Mist oil delivery
- Transparent sight-feed dome gives 360° visibility.
- Accurate drip rate adjustment with red snap action lock.
- Rust-free Zinc Pressure Die Cast body powder-coated for longer life.
- Also optional metal (non-transparent) bowl.



PARAMETERS	SPECIFICATIONS
Pipe Threads	G 1/8, 1/4 Parallel (F) - Standard
	BSPT. / NPT
Type	Micro - Mist
Body Material	Zinc Alloy die-cast
Bowl Material	Standard - Transparent Polycarbonate
	Optional - Zinc Alloy Metal bowl
Bowl Capacity	17 cc
Maximum Inlet Pressure	with PC Bowl : 10.5 kg/cm ² (150 psig)
	with Metal Bowl : 17.5 kg/cm ² (250 psig)
Maximum Operating Temperature (ambient)	with PC Bowl : 50° C (125° F)
	with Metal Bowl : 80° C (175° F)
Standard Nominal Flow Rate (at 6 bar supply and 1 bar drop)	1/8" 6.3 dm ³ /sec (13 scfm)
	1/4" 7.2 dm ³ /sec (15 scfm)
Minimum Flow reqd to start (at 6 bar inlet)	0.25 dm ³ / sec (0.5 scfm)
Mounting Bracket	Optional

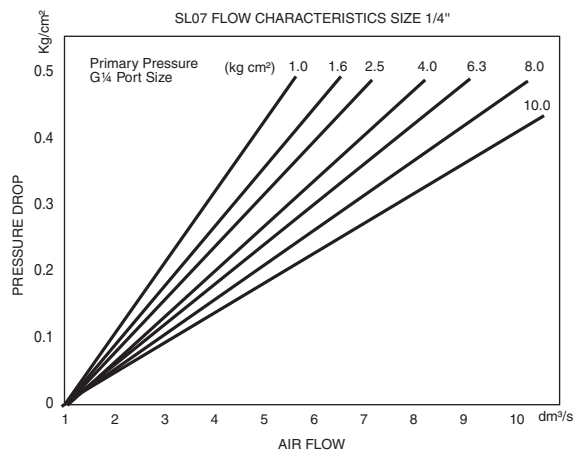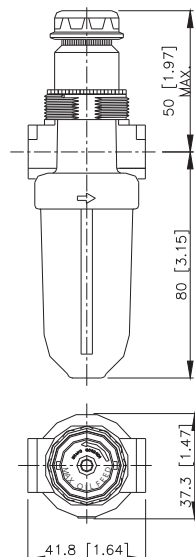

* Technical know-how, design and drawings originally from C.A. Norgren Co. USA


COMPRESSED AIR LUBRICATOR - MINIATURE

FIRST NAME IN PNEUMATICS

SLO7 (G 1/8, G 1/4)

Size	Flow (dm ³ /s)	Start point (dm ³ /s)	Bowl	Bowl Capacity	Model
G 1/8	6.3 dm ³ /sec	0.24 dm ³ /sec	Transparent Metal	17cc	SLO7-100-MPQC SLO7-100-MPFC
G 1/4	7.2 dm ³ /sec	0.24 dm ³ /sec	Transparent Metal		SLO7-200-MPQC SLO7-200-MPFC

Option Selector

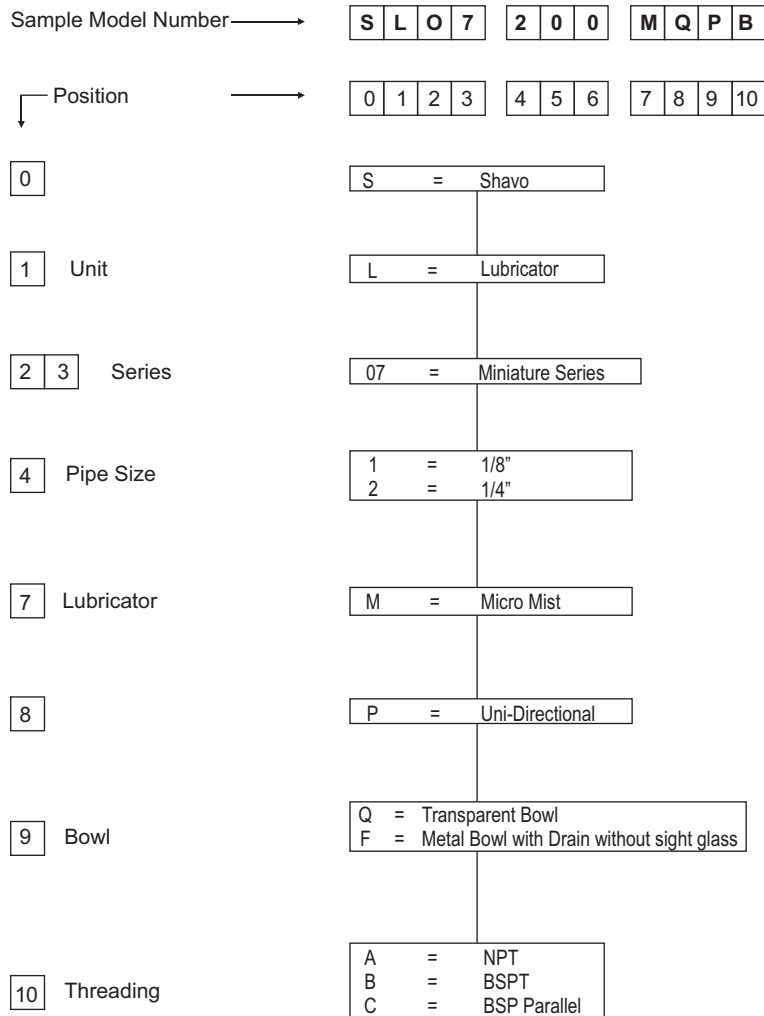

* Technical know-how, design and drawings originally from C.A. Norgren Co. USA