


Compact Cylinders

FEATURES

- Ultra compact, lightweight, space-saving type.
- Available with a comprehensive selection of bore size (Dia.12 mm to 100 mm) for various needs.
- Highly accurate, air-driven push-pull work.

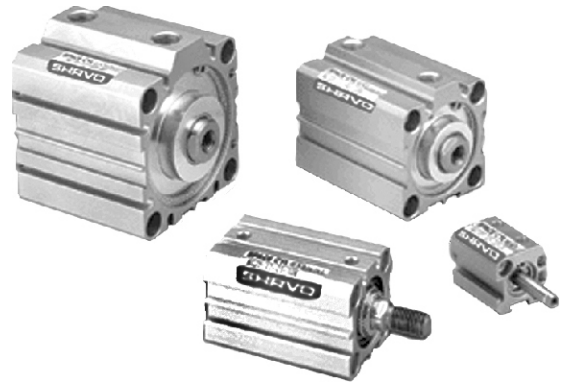

TECHNICAL DATA

- **Medium**
Compressed air, filtered, lubricated or non-lubricated
- **Operation**
Double acting / single acting
- **Max. Operating pressure**
0.5~9.9 kgf/cm²
- **Available Temperature Range**
-5~70°C

MATERIAL

- **Piston rod**
Carbon steel
- **Barrel**
Anodised aluminium
- **End Covers**
Anodised aluminium
- **Seals & 'O'-rings**
Nitrile/Polyurethane


	Bore ∅	Piston rod ∅	Port Size	Standard Strokes mm	Max. Stroke mm
Double Acting - Standard Stroke	12	6	M5x0.8	5, 10, 15, 20, 25, 30	60 mm
	16	8	M5x0.8	"	75 mm
	20	10	M5x0.8	"	100 mm
	25	12	M5x0.8	"	100 mm
	32	16	G1/8		
	40	16	G1/8	5, 10, 15, 20, 25, 30 35, 40, 45, 50	100mm
	50	20	G1/4		
	63	20	G1/4		
	80	25	G3/8	10, 15, 20, 25 30, 35, 40, 45, 50	100mm
	100	30	G3/8		

	Bore ∅	Piston rod ∅	Port Size	Standard Strokes mm
Single Acting - Standard Stroke	12	6	M5x0.8	5~30
	16	8	M5x0.8	
	20	10	M5x0.8	
	25	12	M5x0.8	
	32	16	G1/8	
	40	16	G1/8	

Note : Ncn standard stroke lengths are also available.

OPTION SELECTOR

SEJT - 11 - ★★ - ★★ (M)

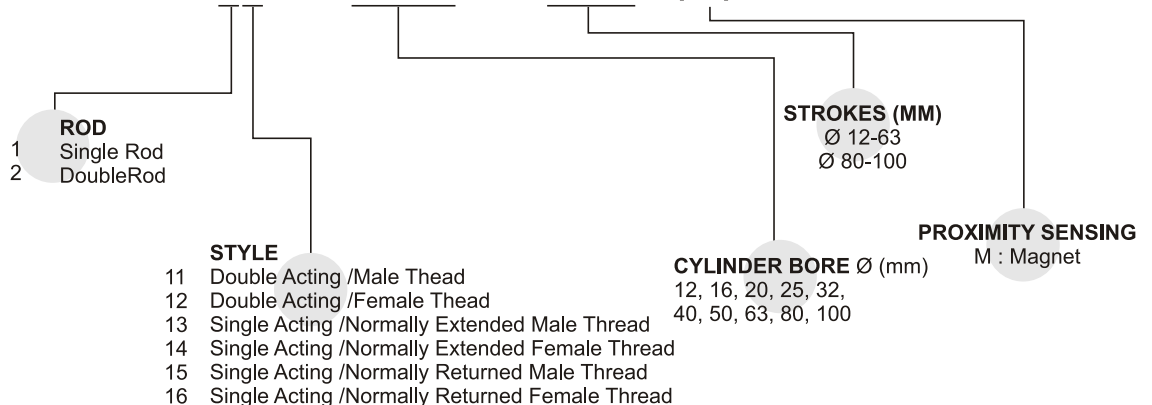

Note : Order reed switch separately.