SVDC Series

Direct Acting Valve

SHAVO
FIRST NAME IN PNEUMATICS

FEATURES

- Directoperated.3/2waydesign
- Smallvolumeticsize
- Modularassembly
- MaintenanceFree

SPECIFICATION

Model	**SVDC-220-3E1**
Portsize	G1/8
No.ofport	3
No.ofposition	2
Medium	CompressedAir,Filtered,LubricatedorNonLubricated
Operatingpressurerange	0.1~10 kgf/cm^2
Effectiveorifice	1.2mm^2
Ambienttemperature	- 5~+ 80?
Voltage	AC110V,220V(50/60)Hz,DC24V
Powerconsumption	AC=6/4.9VA,DC=2.5W
Availablevoltagerange	±10%
Insulation class	Fclass

OPTION SELECTOR

SVDC — 220 — 3E1 — AC110 — L — BSP

- **SVDC** — MODEL Ports 3:3pods
- **220** — BODYSIZE
- **3E1** — Noofcoils E1-Single
- **AC110** — VOLTAGE
  AC220V(50/60)Hz
  AC110V(50/60)Hz
  DC24V
- **L** — Connector
  Blank:DINconnector
  L:LEDindicator
  E:Explosionprotection (Table1)
- **BSP** — PORTTHREAD
  BSP:BSPthread
  NPT:NPTthread

BODYSIZE
3:3ports
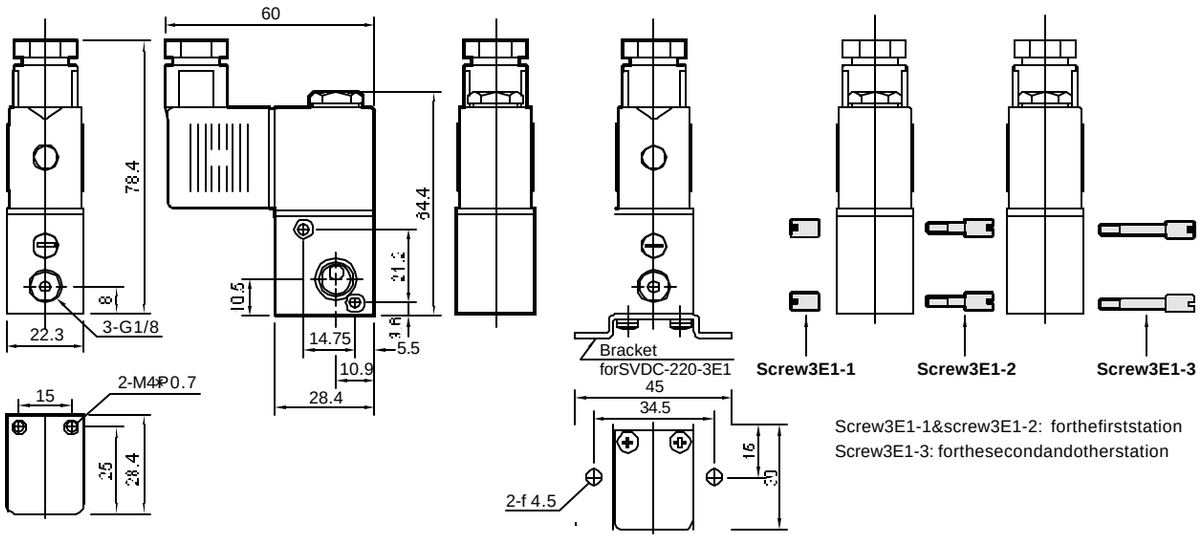
DIMENSIONS: