

## SF27C (G 1/4, G 3/8)

## Features

- Shavo's' Coalescing type oil Removal Filter. Filter Model SF27C is designed as a high-performance product for use in corrosive atmospheres.
- Applications include marine environments, oil and gas production, chemicals and food processing, medical analysis etc.
- SIL 3 capable as per IEC 61508.
- CE, ATEX, EAC[CU TR10(equivalent to GOST R&K)] approved.
- External Metallic parts meet NACE standard MR-01 75\*

(\*National Association of Corrosion Engineers MR-0175 defines requirements for sulphide stress cracking resistant materials used in oilwells and other corrosive environments.)

PARAMETERS	SPECIFICATIONS
Fluid	Compressed Air
Pipe Sizes	1/4", 3/8"
Pipe Thread	NPT - Standard BSPT, BSP - Optional
Max. Inlet Pressure	17.5 bar (250 psi)
Max. Operating Temp. (Ambient)	80°C (Nitrile Elastomers)
Filter Element Material	Boro Silicate
Material of Construction	Stainless Steel as per AISI 316L
Body, Bowl	SS 316L with NACE Compliance (MR 0175)
Internal parts	SS 316L / SS 304
External parts	SS 316L with NACE Compliance (MR 0175)
Elastomers	Nitrile - Standard (- 20°C to +80°C)
Standard Nominal Flow Rate at 6 bar (87 psi) supply pressure and 1 bar (14.5 psi) pressure drop	1/4" - 15 scfm (7 dm³/sec) 3/8" - 15 scfm (7 dm³/sec)
CV Value	1/4" - (0.28) 3/8" - (0.28)
Bowl Capacity	160 ml
Drain	Manual - Std
Particle Removal	upto 0.01 micron
Maximum Oil Removal content	upto 0.01 ppm.
Weight	1.3 Kgs.

Note : Recommended use pre - filter with 5 micron element.

Size	Flow	Element	Drain	Model
1/4" NPT	7 dm³/sec. (15 scfm)	Boro Silicate	Manual	SF27C-200-MOSA-A
3/8" NPT	7 dm³/sec. (15 scfm)	Boro Silicate	Manual	SF27C-300-MOSA-A




## SF27C (G 1/4, G 3/8)

### Option Selector

Sample Model Number → **S F 2 7 C - 2 0 0 - M O S A - X X X - X X X**

Position → **0 1 2 3 4 - 5 6 7 - 8 9 10 11 - 12 13 14 - 15 16 17**

<b>0</b>	<b>S</b> = Shavo
<b>1</b> Product	<b>F</b> = Filter
<b>2 3</b> Series	<b>27</b> = Midi series SS316L (MOC)
<b>4</b> Type	<b>C</b> = Oil Removal
<b>5</b> Port Size	<b>2</b> = 1/4" <b>3</b> = 3/8"
<b>6 7</b> Options	<b>00</b> = NITRILE ELASTOMERS (without Service Life Indicator)
<b>8</b> Drain	<b>M</b> = Manual
<b>9</b> Filter Element	<b>0</b> = Oil Removal (Boro Silicate)
<b>10</b> Bowl	<b>S</b> = STAINLESS STEEL
<b>11</b> Port Thread	<b>A</b> = NPT <b>B</b> = BSPT <b>G</b> = BSP

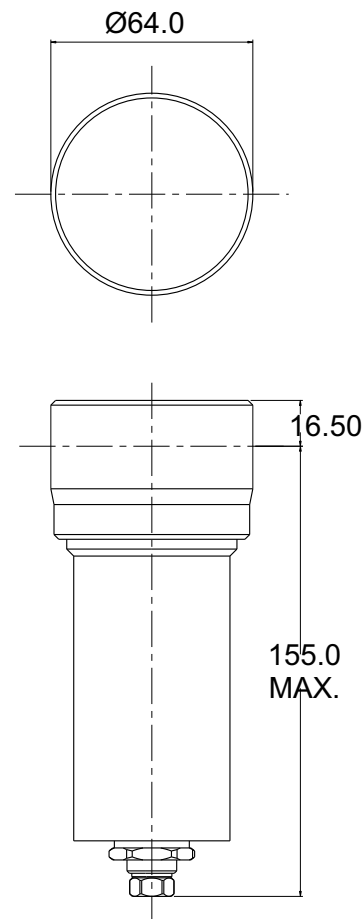

**12 13 14** Test / Approval

<b>A</b>	<b>0</b>	<b>0</b>	ATEX
<b>A</b>	<b>0</b>	<b>1</b>	UKEX
<b>A</b>	<b>0</b>	<b>2</b>	UKCA
<b>A</b>	<b>0</b>	<b>3</b>	ATEX, UKEX, EAC Ex, UKCA
<b>A</b>	<b>0</b>	<b>4</b>	ATEX, UKEX, EAC Ex
<b>A</b>	<b>0</b>	<b>5</b>	ATEX, UKEX, UKCA
<b>A</b>	<b>0</b>	<b>6</b>	ATEX, UKEX, EAC Ex
<b>B</b>	<b>0</b>	<b>0</b>	ATEX, CE
<b>B</b>	<b>0</b>	<b>1</b>	ATEX, CE, UKEX, EAC Ex, UKCA
<b>B</b>	<b>0</b>	<b>2</b>	ATEX, CE, UKEX, EAC Ex
<b>B</b>	<b>0</b>	<b>3</b>	ATEX, CE, UKEX, UKCA
<b>B</b>	<b>0</b>	<b>4</b>	ATEX, CE, UKCA, EAC Ex
<b>B</b>	<b>0</b>	<b>5</b>	ATEX, CE, EAC Ex
<b>C</b>	<b>0</b>	<b>0</b>	CE
<b>C</b>	<b>0</b>	<b>1</b>	CE, UKEX, EAC Ex, UKCA
<b>C</b>	<b>0</b>	<b>2</b>	CE, UKEX, EAC Ex
<b>C</b>	<b>0</b>	<b>3</b>	CE, UKEX, UKCA
<b>C</b>	<b>0</b>	<b>4</b>	CE, EAC Ex, UKCA
<b>C</b>	<b>0</b>	<b>5</b>	CE, EAC Ex

## SF27C (G 1/4, G 3/8)

D	0	0	ATEX, EAC
D	0	1	ATEX, EAC, UKEX, EAC Ex, UKCA
D	0	2	ATEX, EAC, UKEX, EAC Ex
D	0	3	ATEX, EAC, UKEX, UKCA
D	0	4	ATEX, EAC, EAC Ex, UKCA
E	0	0	EAC
E	0	1	EAC, UKEX, EAC Ex, UKCA
E	0	2	EAC, UKEX, EAC Ex
E	0	3	EAC, UKEX, UKCA
E	0	4	EAC, EAC Ex, UKCA
F	0	0	ATEX, SIL3
F	0	1	ATEX, SIL3, UKEX, EAC Ex, UKCA
F	0	2	ATEX, SIL3, UKEX, EAC Ex
F	0	3	ATEX, SIL3, UKEX, UKCA
F	0	4	ATEX, SIL3, EAC Ex, UKCA
F	0	5	ATEX, SIL3, EAC Ex
G	0	0	CE, EAC
G	0	1	CE, EAC, UKEX, EAC Ex, UKCA
G	0	2	CE, EAC, UKEX, EAC Ex
G	0	3	CE, EAC, UKEX, UKCA
G	0	4	CE, EAC, EAC Ex, UKCA
H	0	0	CE, SIL3
H	0	1	CE, SIL3, UKEX, EAC Ex, UKCA
H	0	2	CE, SIL3, UKEX, EAC Ex
H	0	3	CE, SIL3, UKEX, UKCA
H	0	4	CE, SIL3, EAC Ex, UKCA
H	0	5	CE, SIL3, EAC Ex
J	0	0	EAC, SIL3
J	0	1	EAC, SIL3, UKEX, EAC Ex, UKCA
J	0	2	EAC, SIL3, UKEX, EAC Ex
J	0	3	EAC, SIL3, UKEX, UKCA
J	0	4	EAC, SIL3, EAC Ex, UKCA
K	0	0	CE, EAC, SIL3
K	0	1	CE, EAC, SIL3, UKEX, EAC Ex, UKCA
K	0	2	CE, EAC, SIL3, UKEX, UKCA
K	0	3	CE, EAC, SIL3, UKEX, EAC Ex
K	0	4	CE, EAC, SIL3, EAC Ex, UKCA
L	0	0	ATEX, EAC, SIL3
L	0	1	ATEX, EAC, SIL3, UKEX, EAC Ex, UKCA
L	0	2	ATEX, EAC, SIL3, UKEX, EAC Ex
L	0	3	ATEX, EAC, SIL3, UKEX, UKCA
L	0	4	ATEX, EAC, SIL3, EAC Ex, UKCA
M	0	0	ATEX, CE, SIL3
M	0	1	ATEX, CE, SIL3, UKEX, EAC Ex, UKCA
M	0	2	ATEX, CE, SIL3, UKEX, EAC Ex
M	0	3	ATEX, CE, SIL3, UKEX, UKCA
M	0	4	ATEX, CE, SIL3, EAC Ex, UKCA
N	0	0	ATEX, CE, EAC
N	0	1	ATEX, CE, EAC, UKEX, EAC Ex, UKCA
N	0	2	ATEX, CE, EAC, UKEX, EAC Ex
N	0	3	ATEX, CE, EAC, UKEX, UKCA
N	0	4	ATEX, CE, EAC, EAC Ex, UKCA

## SF27C (G 1/4, G 3/8)

[O]	[0]	[0]	Other customer special requirement if Any
P	0	0	ATEX, CE, EAC, SIL3
P	0	1	ATEX, CE, EAC, SIL3, UKEX, EAC Ex, UKCA
P	0	2	ATEX, CE, EAC, SIL3, UKEX, EAC Ex
P	0	3	ATEX, CE, EAC, SIL3, UKEX, UKCA
P	0	4	ATEX, CE, EAC, SIL3, EAC Ex, UKCA
Q	0	0	ATEX, EAC Ex
R	0	0	EAC Ex
R	0	1	EAC Ex, UKEX, UKCA
R	0	2	EAC Ex, UKCA
S	0	0	SIL3
S	0	1	SIL3, UKEX, EAC Ex, UKCA
S	0	2	SIL3, UKEX, EAC Ex
S	0	3	SIL3, UKEX, UKCA
S	0	4	SIL3, EAC Ex, UKCA
V	0	0	ATEX, CE, SIL3, EAC Ex
V	0	1	ATEX, CE, SIL3, EAC Ex, UKEX, UKCA
V	0	2	ATEX, CE, SIL3, EAC Ex, UKEX
V	0	3	ATEX, CE, SIL3, EAC Ex, UKCA
X	X	X	STANDARD UNITS WITHOUT ANY CERTIFICATE / APPROVAL
Y	0	0	ATEX, SIL3, EACEx
Y	0	1	ATEX, SIL3, EACEx, UKEX, UKCA
Y	0	2	ATEX, SIL3, EAC Ex, UKEX
Y	0	3	ATEX, SIL3, EACEx, UKCA
Z	0	1	CE, SIL3, EAC Ex, UKEX, UKCA
Z	0	2	CE, SIL3, EAC Ex, UKEX
Z	0	3	CE, SIL3, EAC Ex, UKCA

X	X	X	Standard Unit Without any Compliance
A	0	1	RoHS 3 Compliance
A	0	2	REACH Compliance
A	0	3	Copper Free (Only Applicable Aluminium Version)
A	0	4	RoHS3, REACH Compliance
A	0	5	RoHS3, REACH, Copper Free (Only Applicable for Aluminium Version)
A	0	6	RoHS3, Copper Free (Only Applicable for Aluminium Version)
A	0	7	REACH, Copper Free (Only Applicable for Aluminium Version)

15 16 17 Compliance